



HOLLOW METAL DOOR — HINGE LOCATION CHART

1 3/4" DOORS

Standard Weight 1 3/4" / 4-1/2" Hinges | Stocking locations: Steelcraft, Curries, Mesker, Pioneer, CECO

HINGE LOCATIONS (A, B, C, D)
 Measure from the top of the door to the top of each hinge cut-out.


LOCK LOCATION (E)
 Measure from the top of the door to the center-line of the lock cut-out.

MANUFACTURER	6' 8"				7' 0"				8' 0"				
	A	B	C	E	A	B	C	E	A	B	C	D	E
CURRIES	4 7/8"	35 1/8"	65 3/8"	39 7/8"	4 7/8"	37 1/8"	69 3/8"	43 7/8"	4 7/8"	30 3/8"	55 7/8"	81 3/8"	55 7/8"
CECO	6 5/8"	37 5/8"	68 5/8"	38 1/16"	6 5/8"	39 5/8"	72 5/8"	42 1/16"	6 5/8"	32 5/8"	58 5/8"	84 5/8"	54 1/16"
MESKER	4 7/8"	35 1/8"	65 3/8"	39 9/16"	4 7/8"	37 1/8"	69 3/8"	43 9/16"	4 7/8"	30 3/8"	55 7/8"	81 3/8"	55 9/16"
PIONEER	4 7/8"	35 1/8"	65 3/8"	41 7/8"	4 7/8"	37 1/8"	69 3/8"	45 7/8"	4 7/8"	30 3/8"	55 7/8"	81 3/8"	57 7/8"
STEELCRAFT	7 3/8"	37 5/16"	67 1/4"	39 9/16"	7 3/8"	39 5/16"	71 1/4"	43 9/16"	7 3/8"	32 21/32"	57 15/16"	83 1/4"	55 9/16"

TYPICAL DOOR ELEVATION (4-1/2" HINGE) *Letters correspond to the table above*

NOTES

- 8' 0" doors have a 4th hinge; bottom hinge = D.
- Standard undercut on all doors is 3/4", except Curries and Pioneer, which is 5/8".
- Dimensions apply to 1 3/4" doors with standard weight 4-1/2" hinges.
- Any hinge position, prep, cut-out and reinforcement available as per main US manufacturers. Special locations available upon request.
- All dimensions current at time of publication. Refer to SDI-129 for updated dimensions.

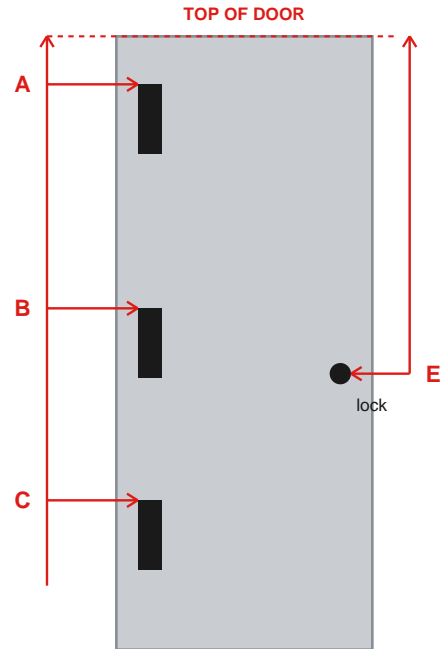

Measure top-of-door to TOP of each hinge
 D = 4th hinge (8' 0" doors)