



# HOLLOW METAL FRAME — HINGE LOCATION CHART 1 3/4" DOORS

Standard Weight 1 3/4" / 4-1/2" Hinges | 4-7/8" ASA Strike | Stocking locations: Steelcraft, Curries, Mesker, Pioneer, CECO

**HINGE LOCATIONS (A, B, C, D)**  
 Measure from the underside of the frame head to the top of each hinge cut-out.


**STRIKE LOCATION (E)**  
 Measure from the underside of the frame head to the center-line of the strike.

MANUFACTURER	6' 8"				7' 0"				8' 0"				
	A	B	C	E	A	B	C	E	A	B	C	D	E
<b>CURRIES</b>	5"	35 1/4"	65 1/2"	40"	5"	37 1/4"	69 1/2"	44"	5"	30 1/2"	56"	81 1/2"	56"
<b>CECO</b>	6 3/4"	37 3/4"	68 3/4"	38 3/16"	6 3/4"	39 3/4"	72 3/4"	42 3/16"	6 3/4"	32 3/4"	58 3/4"	84 3/4"	54 3/16"
<b>MESKER</b>	5"	35 1/4"	65 1/2"	39 11/16"	5"	37 1/4"	69 1/2"	43 11/16"	5"	30 1/2"	56"	81 1/2"	55 11/16"
<b>PIONEER</b>	5"	35 1/4"	65 1/2"	42"	5"	37 1/4"	69 1/2"	46"	5"	30 1/2"	56"	81 1/2"	58"
<b>STEELCRAFT</b>	7 1/2"	37 7/16"	67 3/8"	39 11/16"	7 1/2"	39 7/16"	71 3/8"	43 11/16"	7 1/2"	32 13/16"	58 1/8"	83 7/16"	55 11/16"

**TYPICAL FRAME ELEVATION (4-1/2" HINGE)** *Letters correspond to the table above*

**NOTES**

- 8' 0" frames have a 4th hinge; bottom hinge = D.
- Dimensions apply to 1 3/4" doors with standard weight 4-1/2" hinges and 4-7/8" ASA strike preparation.
- Any hinge position, prep, cut-out and reinforcement available as per main US manufacturers. Special locations available upon request.
- All dimensions current at time of publication. Refer to SDI-129 for updated dimensions.

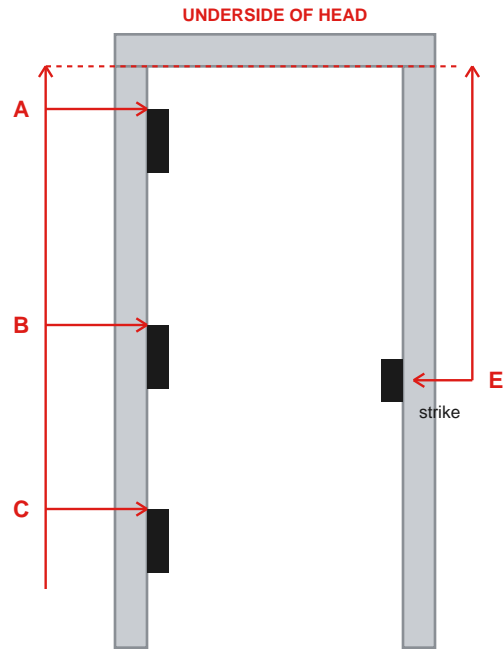

Measure underside-of-head to TOP of each hinge  
 D = 4th hinge (8' 0" frames)