

DXML SERIES

GRADE 1



FEATURES:

- Door Thickness: 1 3/4"
- Backset: 2 3/4"
- Faceplate: 1 1/4" x 8" - Rosette: 2 1/2"
- UL R15846 3 hour fire rated latch
- 1" throw bolt
- 1" Mortise Cylinder
- SC6 Schlage "C" 6 pin keyway
- Sectional (SS) and Escutcheon (SE) trim available
- Levers are ADA compliant
- Handed (must specify LH or RH). Field reversible
- Functions: See below
- Warranty: 1 year mechanical and finish
- Finish: US26D


TRIM SPECIFICATIONS:

- Heavy duty commercial; Grade 1
 - DL-SS: Sectional leverset with rosette, Solid Brass
 - DL-SE: Escutcheon handleset, Rectangular plate, Solid Brass
 - Meets ADA requirements
 - Latitude style lever offered
- Part Number: DL-DXML53SS-LAT-26D

CROSS REFERENCE

FUNCTION	ANSI NO	TA	ARROW B SERIES	CORBIN/RUSSWIN ML2200	SARGENT 7700/8100	SCHLAGE L SERIES	PDQ Series 1000	YALE
PASSAGE	F01	DXML10	B01	ML2210	13	ML2210	13	8701
PRIVACY	F22	DXML40	B02	ML2220	65	ML2220	65	8702
ENTRANCE	F12	DXML53	B11	ML2267	45	ML2267	45	8747
CLASSROOM	F05	DXML70	B17	ML2255	37	ML2255	37	8708
STOREROOM	F07	DXML80	B12	ML2257	4	ML2257	4	8705

DOOR PREP DIAGRAM

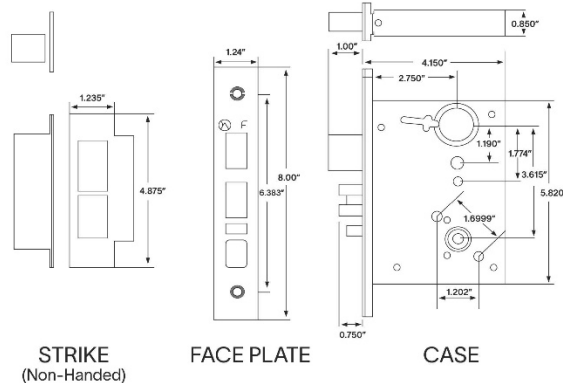

www.impusa.com




DXML SERIES

GRADE 1

HEAVY DUTY COMMERCIAL MORTISE LOCK

The DXML mortise lockset is designed for heavy duty commercial and industrial applications. This series meets ADA handicap compliance and meets a 3 hour UL R15846 fire rating.

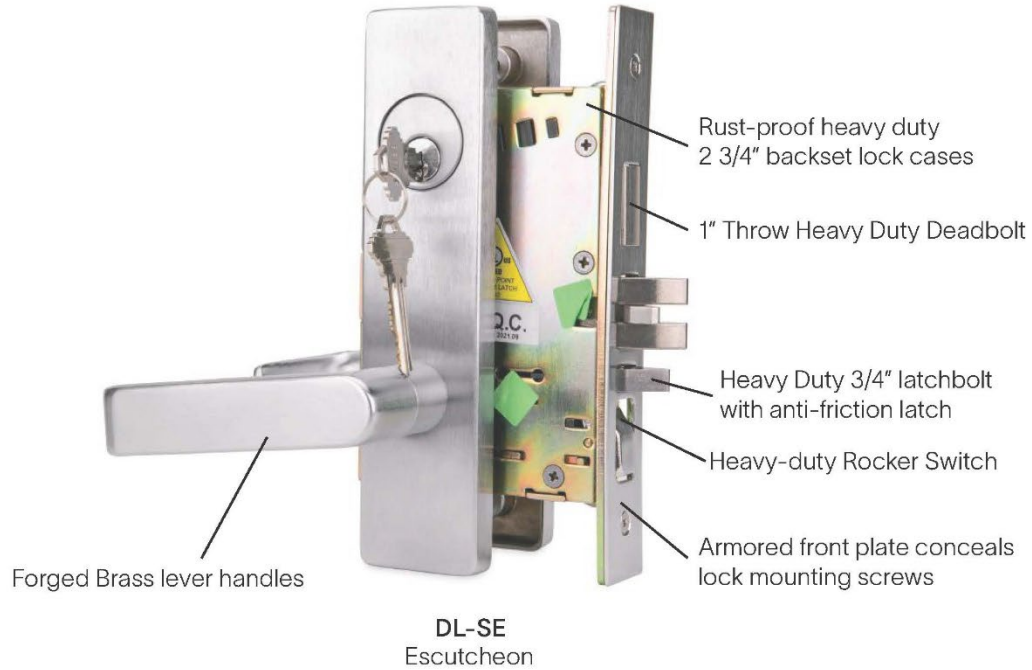

DL-DXML53SS-LAT-26D

LAT
(Latitude)



DL-SS
Sectional



CODE COMPLIANCE

- ANSI A156.2 Grade 1, UL10C and UBC 7.2 for positive pressure
- ANSI A117.1 ADA Barrier-free Accessibility
- UL R15846

6

www.impusa.com